


描述:
Description:
示例:
Example:

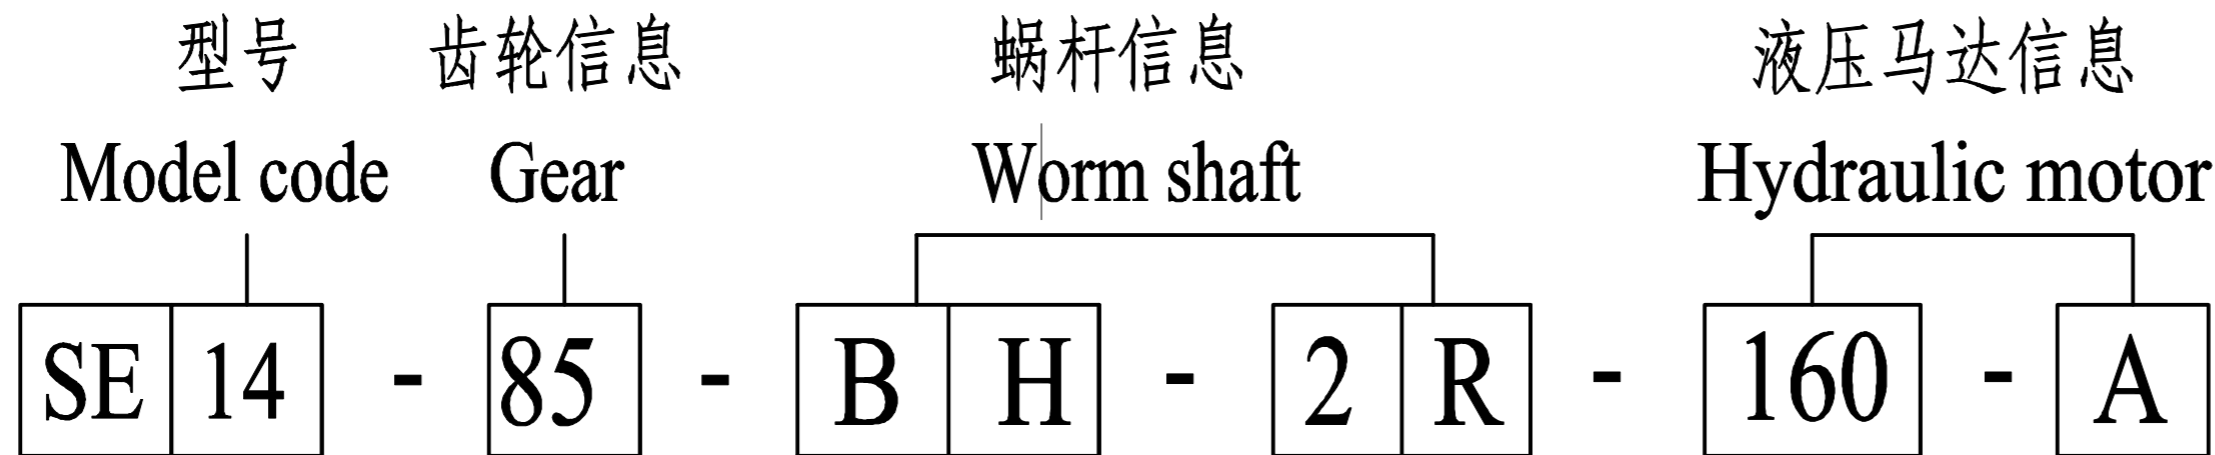

- A or None —— 油口在外侧 Away (oil port)
- I —— 油口在内侧 Inside (oil port)
- U —— 油口在上方 Up (oil port)
- D —— 油口在下方 Down (oil port)
- 160 —— 液压马达排量 Hydraulic motor's displacement,cc/rev.(by design,such as "160")
- R —— 液压马达位置在右侧, 如图 Hydraulic motor position, right side, view chart
- L —— 液压马达位置在左侧, 如图 Hydraulic motor position, left side, view chart
- None —— 蜗杆数量, 未注出表示为一根蜗杆 Shaft number, None meaning is only one worm
- 2 —— 表示为2根蜗杆传动 Dual worm drive
- None —— 蜗杆非输入端为闷盖 Shaft opposite to motor, capped end
- H —— 蜗杆非输入端为六角突出 Worm hex extrusion
- E —— 蜗杆非输入端带编码器 Shaft opposite to motor, with encoder
- None —— 配液压马达时, 省略 Omitted with hydraulic motor
- B —— 蜗杆输入孔为SAE 6B花键 SAE 6B spline
- 12 —— 蜗杆输入孔为 $\varnothing 12$ 12mm keyed shaft
- 16 —— 蜗杆输入孔为 $\varnothing 16$ 16mm keyed shaft
- 25 —— 蜗杆输入孔为 $\varnothing 25$ 25mm keyed shaft
- 85 —— 回转减速机的减速比 Reduction ratio
- 14 —— 钢球滚道直径近似英寸尺寸 Diameter of raceway in inch
- SE —— 围栏型回转减速器 Enclosed housing slewing drive
- S —— 敞开型回转减速器 Open housing slewing drive